



# CFM130M Series

## Application Note V15 December

---

### 130W AC-DC Power Supply with PFC CFM130M Series APPLICATION NOTE



**Approved By:**

| Department                             | Approved By | Checked By | Written By |
|----------------------------------------|-------------|------------|------------|
| Research and Development<br>Department | Ovid        | Calvin     | Kaimi      |
| Design Quality<br>Department           | Benny       | JoJo       |            |



# CFM130M Series

## Application Note V15 December

---

### Content

|                                                        |          |
|--------------------------------------------------------|----------|
| <b>1. INTRODUCTION</b>                                 | <b>3</b> |
| <b>2. ELECTRICAL BLOCK DIAGRAM</b>                     | <b>3</b> |
| <b>3. MAIN FEATURES AND FUNCTIONS</b>                  | <b>4</b> |
| 3.1 <i>Operating Temperature Range</i>                 | 4        |
| 3.2 <i>Output Protection (Over Current Protection)</i> | 4        |
| <b>4. APPLICATIONS</b>                                 | <b>4</b> |
| 4.1 <i>Test Set-Up</i>                                 | 4        |
| 4.2 <i>Output Ripple and Noise Measurement</i>         | 4        |
| 4.3 <i>Installation Instruction</i>                    | 5        |
| 4.4 <i>EMI Test</i>                                    | 6        |
| 4.5 <i>Mating Connectors</i>                           | 6        |
| <b>5. PACKING INFORMATION</b>                          | <b>7</b> |




# CFM130M Series

## Application Note V15 December

### 1. Introduction

This application note describes the features and functions of Cincon's CFM130M series of open frame, switching AC-DC power module. These are highly efficient, reliable, compact, high power density, single output AC/DC power modules. The module is fully protected against short circuit and over-voltage conditions. Cincon's world class automated manufacturing methods, together with an extensive testing and qualification program, ensure that the CFM130M series power module is extremely reliable.

### 2. Electrical Block Diagram

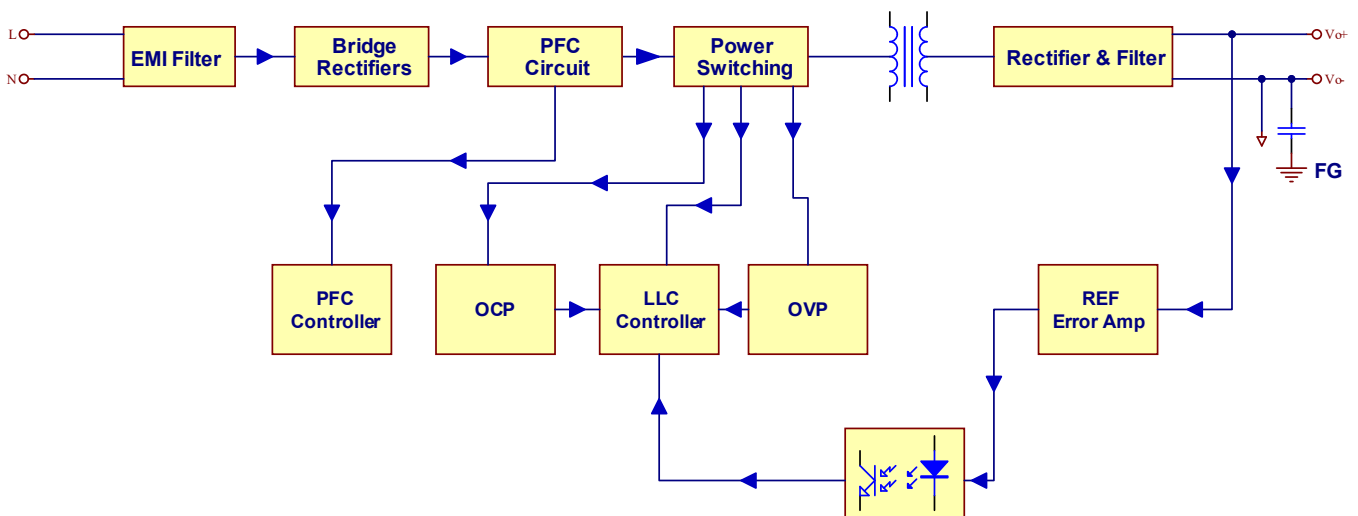



# CFM130M Series

## Application Note V15 December

### 3. Main Features and Functions

#### 3.1 Operating Temperature Range

The highly efficient design of Cincon's CFM130M series power modules has resulted in their ability to operate within ambient temperature environments from -30°C to 70°C. Due consideration must be given to the de-rating curves when ascertaining the maximum power that can be drawn from the module. The maximum power which can be drawn is influenced by a number of factors, such as:

- Input voltage range
- Permissible output load (per derating curve)
- Effective heat sinks

#### 3.2 Output Protection (Over Current Protection)

The power modules provide full continuous short-circuit protection. The unit will auto recover once the short circuit is removed. To provide protection in a fault condition, the unit is equipped with internal over-current protection range, please refer to the specification sheet. The unit will operate normally once the fault condition is removed.

### 4. Applications

#### 4.1 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 1. When testing the Cincon's CFM130M series under any transient conditions, please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the

- Efficiency
- Load regulation and line regulation

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{P_{in}} \times 100\%$$

Where:

$V_o$  is output voltage

$I_o$  is output current

$P_{in}$  is input power

The value of load regulation is defined as:

$$Load\ reg. = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

$V_{FL}$  is the output voltage at full load

$V_{NL}$  is the output voltage at 10% load

The value of line regulation is defined as:

$$Line\ reg. = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

$V_{HL}$  is the output voltage of maximum input voltage at full load

$V_{LL}$  is the output voltage of minimum input voltage at full load

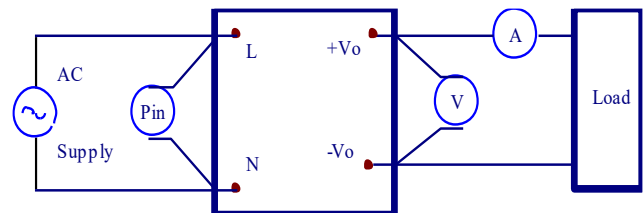


Figure 1. CFM130M Series Test Setup

#### 4.2 Output Ripple and Noise Measurement

The test set-up for noise and ripple measurements is shown in Figure 2. Measured method:

Add a C2=0.1uF ceramic capacitor and a C1=10uF electrolytic capacitor to output at 20 MHz Band Width.

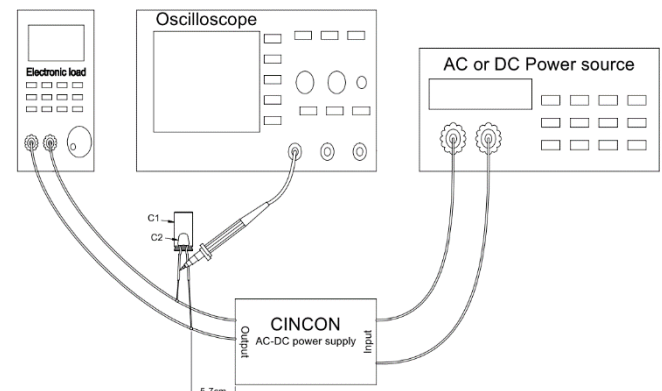


Figure 2. Output Voltage Ripple and Noise Measurement Set-Up




# CFM130M Series

## Application Note V15 December

### 4.3 Installation Instruction

The CFM130M series has four 3.2mm diameter mounting holes. There are three type installations for CFM130M. Please use the mounting holes as follows: Insert the spacer (5.5mm diameter max.) of 5mm height or more to mount the unit.

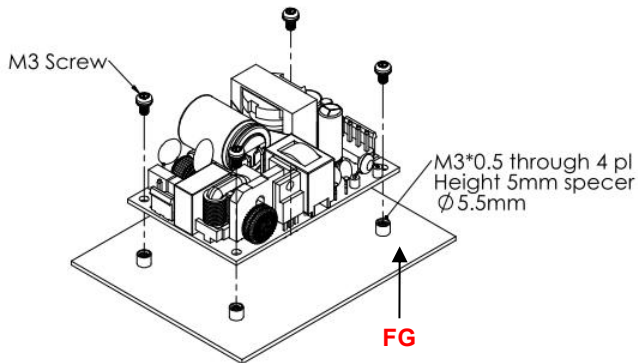


**CFM130MXXX Installation Diagram**

Note:

M3 screw head and washer diameter shall not exceed 5.5mm.



The CFM130M series provide the baseplate cooling for customer to increasing heat dissipation. Please refer to the following figure for installation.

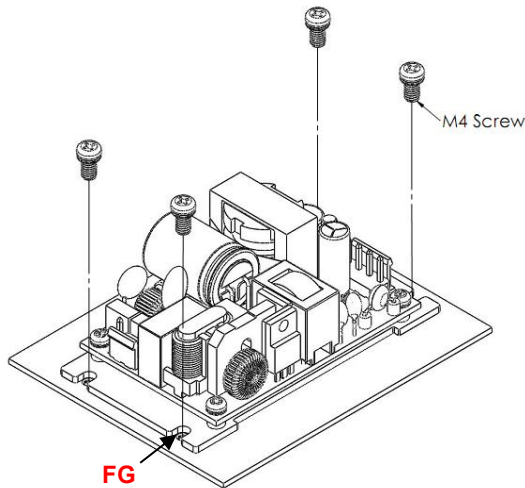

**CFM130MXXX-B installation diagram**

Note:

M4 screw head and washer diameter shall not exceed 5.5mm.

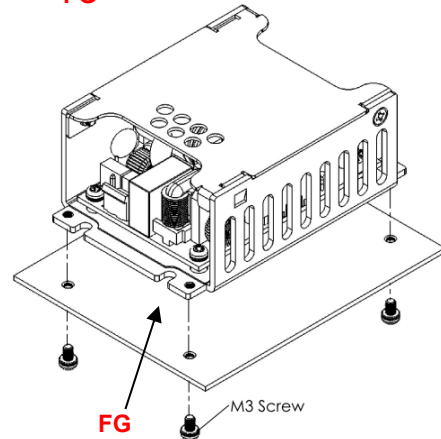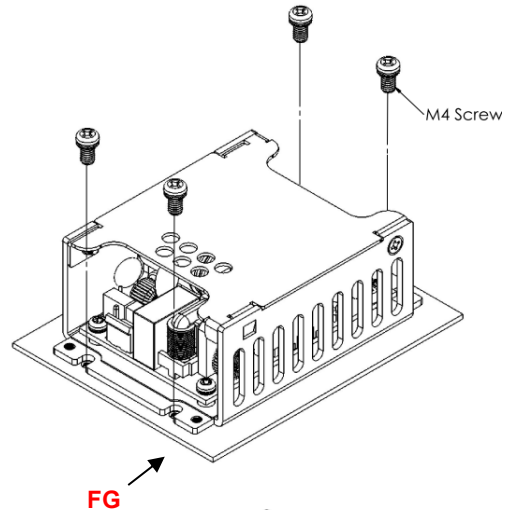


**CFM130MXXX-C installation diagram**

Note:

M3&M4 screw head and washer diameter shall not exceed 5.5mm

Please allow 4mm side clearance from the components and all side of the PCB. Allow 5mm clearance above the highest parts on the PCB. Be especially careful to allow 5mm between the solder side of the PCB and the mounting surface. If the clearances are not sufficient the specifications for isolation and withstand will not be valid.

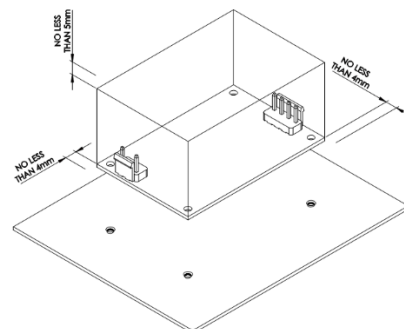

FG should be connected to the earth (ground) terminal of the apparatus. If not the conducted noise and output noise will increase.



# CFM130M Series


## Application Note V15 December

---

### 4.4 EMI Test

The CFM130M series Conductive EMI meets EN55011 Class B when test condition is Class I & Class II.  
Radiation meet EN55011 Class B when test condition is Class I.  
Radiation meet EN55011 Class A when test condition is Class II.

### 4.5 Mating Connectors

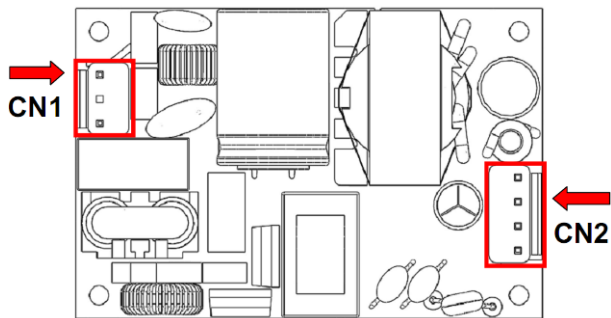

|                                   |                                                                                                      |
|-----------------------------------|------------------------------------------------------------------------------------------------------|
| AC Input (CN1)<br>DC Output (CN2) | Wafer: TAIWAN KING PIN TERMINAL PVHI series or equivalent.<br>Housing: JST VHR series or equivalent. |
|-----------------------------------|------------------------------------------------------------------------------------------------------|




# CFM130M Series

## Application Note V15 December


### 5. Packing Information

The packing information for CFM130MXXX series is showing as follows:

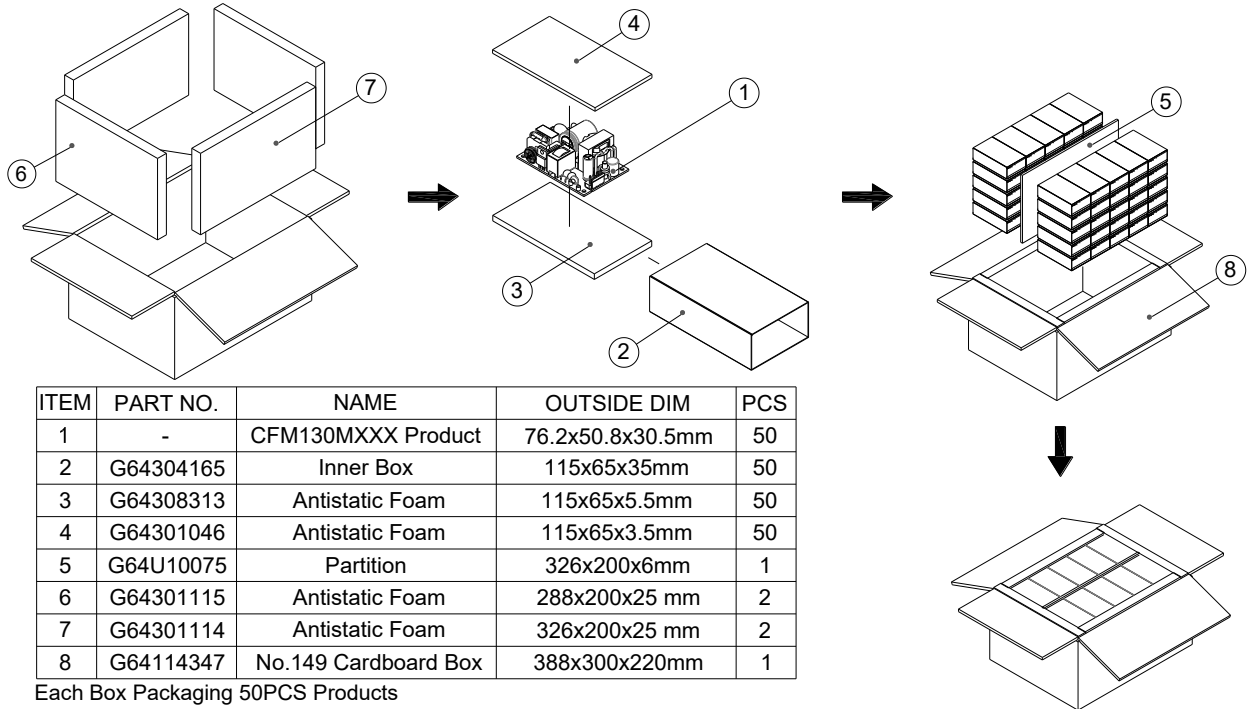

Each Box Packaging 50PCS Products  
 Net weight Ref. 6.8 Kg  
 Gross Weight Ref. 8.3Kg

The packing information for CFM130MXXX-B series is showing as follows:

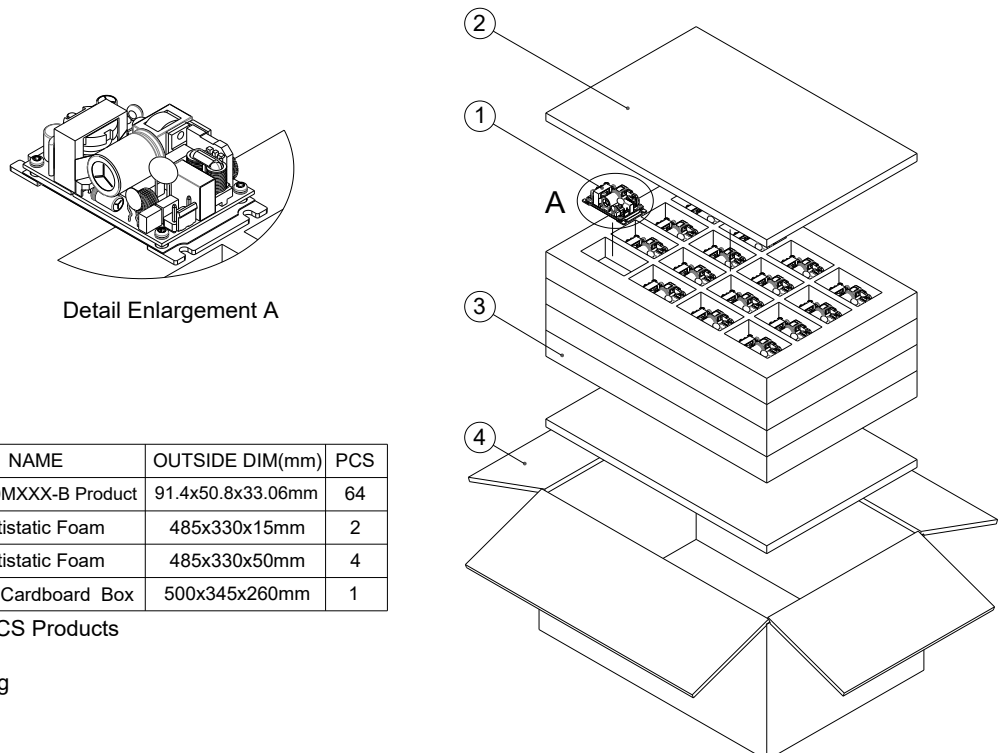


Each Box Packaging 64 PCS Products  
 Net weight Ref. 10.88 Kg  
 Gross weight Ref. 12.38 Kg



# CFM130M Series

## Application Note V15 December

The packing information for CFM130MXXX-C series is showing as follows:




Detail Enlargement A

| ITEM | PART NO.  | NAME                 | OUTSIDE DIM(mm) | PCS |
|------|-----------|----------------------|-----------------|-----|
| 1    | -         | CFM130MXXX-C Product | 91.4x64x34.5mm  | 48  |
| 3    | G64301210 | Antistatic Foam      | 485x330x50mm    | 4   |
| 2    | G64301208 | Antistatic Foam      | 485x330x15mm    | 2   |
| 4    | G64100099 | No.49 Cardboard Box  | 500x345x260mm   | 1   |

Each Box Packaging 48 PCS Products

Net weight Ref. 10.464 Kg

Gross weight Ref. 11.964 Kg

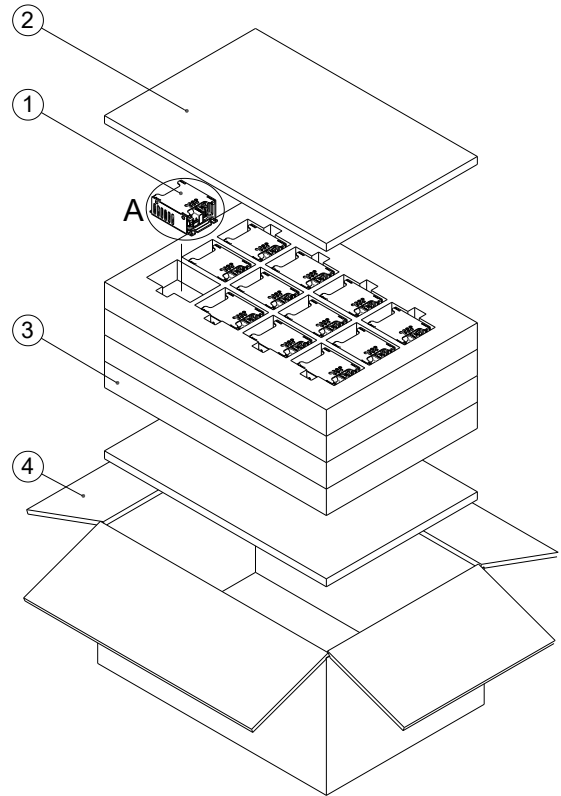

### CINCON ELECTRONICS CO., LTD.

#### Headquarters:

14F, No.306, Sec.4, Hsin Yi Rd.  
Taipei, Taiwan  
Tel: 886-2-27086210  
Fax: 886-2-27029852  
E-mail: [sales@cincon.com.tw](mailto:sales@cincon.com.tw)  
Web Site: <https://www.cincon.com>

#### Factory:

No. 8-1, Fu Kung Rd.  
Fu Hsing Industrial Park  
Fu Hsing Hsiang,  
Chang Hua Hsien, Taiwan  
Tel: 886-4-7690261  
Fax: 886-4-7698031

#### Cincon North America:

1655 Mesa Verde Ave. Ste 180  
Ventura, CA 93003  
Tel: 805-639-3350  
Fax: 805-639-4101  
E-mail: [info@cincon.com](mailto:info@cincon.com)