



TRH100A Series

Application Note V13 October 2025

100W AC-DC Medical Switch Power Adapter TRH100A Series APPLICATION NOTE



Approved By:

Department	Approved By	Checked By	Written By
Research and Development Department	Ovid	Calvin	Kaimi
Design Quality Department	Benny	JoJo	



TRH100A Series

Application Note V13 October 2025

Content

1. INTRODUCTION	3
2. ELECTRICAL BLOCK DIAGRAM	3
3. MAIN FEATURES AND FUNCTIONS	4
3.1 <i>Operating Temperature Range</i>	4
3.2 <i>Output Protection (Over Current Protection)</i>	4
4. APPLICATIONS	4
4.1 <i>Test Set-Up</i>	4
4.2 <i>Output Ripple and Noise Measurement</i>	4
5. PACKING INFORMATION	5




TRH100A Series

Application Note V13 October 2025

1. Introduction

This application note describes the features and functions of Cincon's TRH100A series of switch power adapter. These are highly efficient, reliable, compact, high power density, single output AC/DC switch power adapter. The switch power adapter is fully protected against short circuit and over-voltage conditions. Cincon's world class automated manufacturing methods, together with an extensive testing and qualification program, ensure that the TRH100A series switch power adapter is extremely reliable.

2. Electrical Block Diagram

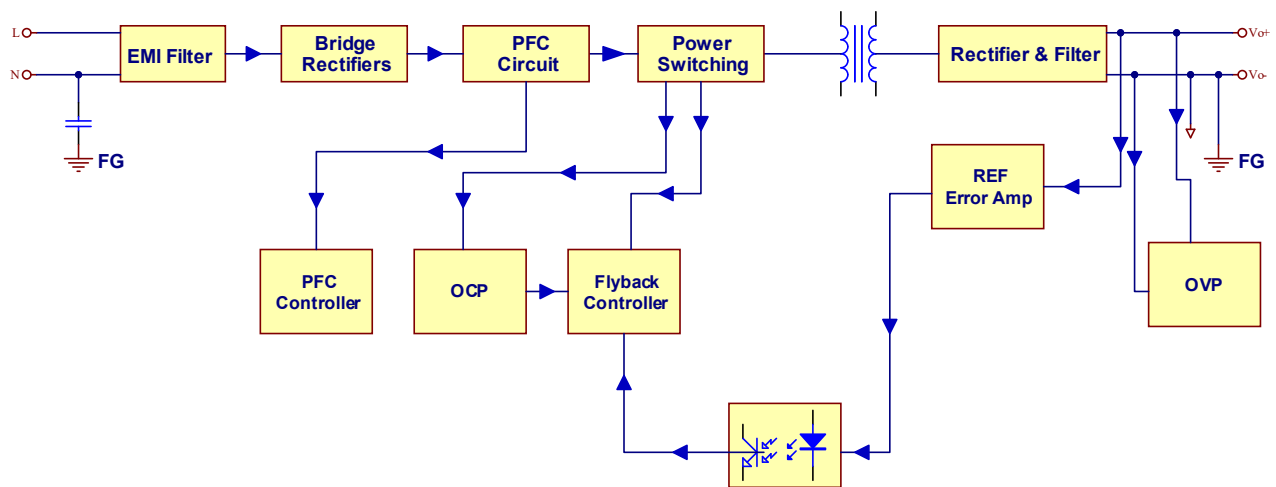



TRH100A Series

Application Note V13 October 2025

3. Main Features and Functions

3.1 Operating Temperature Range

The highly efficient design of Cincon's TRH100A series switch power adapter has resulted in their ability to operate within ambient temperature environments from -30°C to 70°C (40°C~70°C with 2.5%/°C de-rating).

Due consideration must be given to the de-rating curves when ascertaining the maximum power that can be drawn from the switch power adapter. The maximum power which can be drawn is influenced by a number of factors, such as:

- Input voltage range
- Permissible output load (per derating curve)
- Effective heat sinks

3.2 Output Protection (Over Current Protection)

The switch power adapter provide full continuous short-circuit protection. The unit will auto recover once the short circuit is removed. To provide protection in a fault condition, the unit is equipped with internal over-current protection range, please refer to the specification sheet. The unit will operate normally once the fault condition is removed.

4. Applications

4.1 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 1. When testing the Cincon's TRH100A series under any transient conditions, please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the

- Efficiency
- Load regulation and line regulation

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{P_{in}} \times 100\%$$

Where:

V_o is output voltage
 I_o is output current
 P_{in} is input power

The value of load regulation is defined as:

$$Load\ reg1. = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

V_{FL} is the output voltage at full load

V_{NL} is the output voltage at 60% load

$$Load\ reg2. = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

V_{FL} is the output voltage at 60% load

V_{NL} is the output voltage at 20% load

The value of line regulation is defined as:

$$Line\ reg. = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

V_{HL} is the output voltage of maximum input voltage at full load

V_{LL} is the output voltage of minimum input voltage at full load

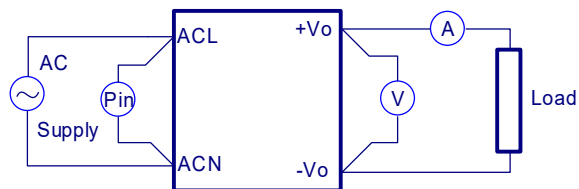


Figure 1. TRH100A Series Test Setup

4.2 Output Ripple and Noise Measurement

The test set-up for noise and ripple measurements is shown in Figure 2. Measured method:

Add a C2=0.1uF ceramic capacitor and a C1=10uF electrolytic capacitor to output at 20 MHz Band Width.

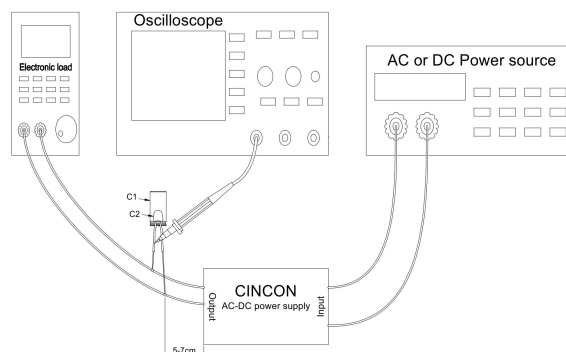


Figure 2. Output Voltage Ripple and Noise Measurement Set up




TRH100A Series

Application Note V13 October 2025

5. Packing Information

The packing information for TRH100A series is showing as follows:

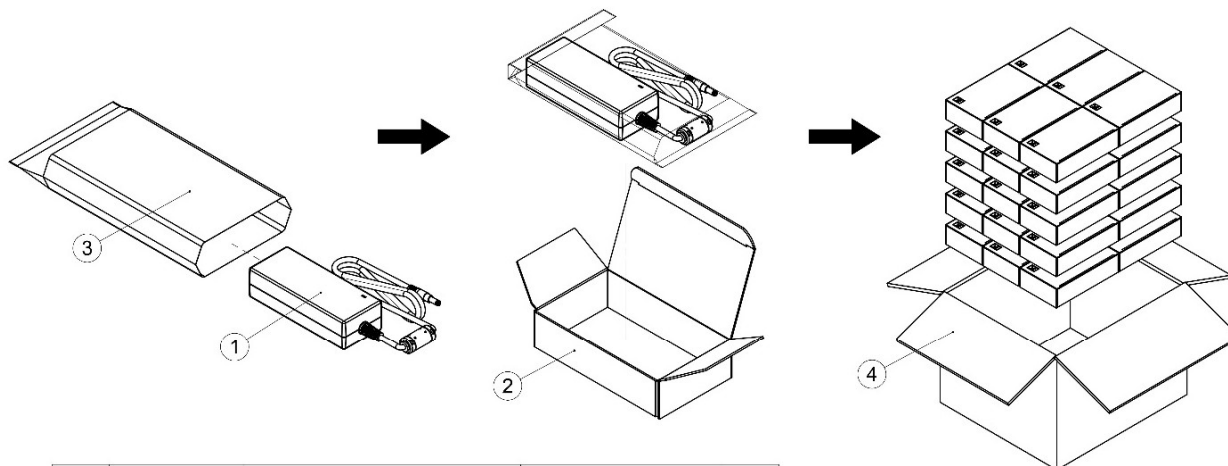

ITEM	PART NO.	NAME	OUTSIDE DIM	PCS
1	G98~	TRH100AXXX Product	142x58x37mm	30
2	G64205321	Inner Box	185x110x50mm	30
3	G64D15057	Plastic Bag	155x245mmx0.08mm	30
4	G64114345	No.163 Cardboard Box	385x345x280mm	1

Each Box Packaging 30 PCS Products

Gross weight Ref. 16.5 Kg

Headquarters:

14F, No.306, Sec.4, Hsin Yi Rd.
Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com
Web Site: <https://www.cincon.com>

CINCON ELECTRONICS CO., LTD.

Factory:

No. 8-1, Fu Kung Rd.
Fu Hsing Industrial Park
Fu Hsing Hsiang,
Chang Hua Hsien, Taiwan
Tel: 886-4-7690261
Fax: 886-4-7698031

Cincon North America:

1655 Mesa Verde Ave. Ste 180
Ventura, CA 93003
Tel: 805-639-3350
Fax: 805-639-4101
E-mail: info@cincon.com