



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

ISOLATED DC-DC CONVERTER CHB50 SERIES APPLICATION NOTE



Approved By:

Department	Approved By	Checked By	Written By
Research and Development Department	Jacky	Danny/Tony	Miko
Design Quality Department	Benny	JoJo	



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

Contents

1. Introduction	3
2. DC-DC Converter Features	3
3. Electrical Block Diagram	3
4. Technical Specifications	4
5. Main Features and Functions	7
5.1 Operating Temperature Range	7
5.2 Output Voltage Adjustment	7
5.3 Over Current Protection	7
5.4 Output Over Voltage Protection	7
5.6 Remote On/Off	7
5.7 UVLO (Under Voltage Lock Out)	7
5.8 Over Temperature Protection	7
6. Applications	8
6.1 Recommended Layout, PCB Footprint and Soldering Information	8
6.2 Convection Requirements for Cooling	8
6.3 Thermal Considerations	8
6.4 Input Capacitance at The Power Module	9
6.5 Power Derating	10
6.6 Half Brick Heat Sinks	11
6.7 Efficiency VS. Load	12
6.8 Test Set-Up	14
6.9 Output Voltage Adjustment	14
6.10 Output Remote Sensing	15
6.11 Output Ripple and Noise	15
6.12 Output Capacitance	15
7. Safety & EMC	16
7.1 Input Fusing and Safety Considerations	16
7.2 EMC Considerations	16
8. Part Number	22



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

1. Introduction

The CHB50 series offers 33-50 watts of output power with high power density in an industry standard half-brick package. The CHB50 series has wide (2:1) input voltage ranges of 9-18VDC, 18-36VDC, 36-75VDC and provides a precisely regulated output. This series has features such as high efficiency, 1500VDC isolation and a case operating temperature range of -40°C to 100°C. The modules are fully protected against input UVLO (under voltage lock out), output short circuit, output over voltage and over temperature conditions. Furthermore, the standard control functions include remote **on/off** and output voltage trimming. All models are highly suited to telecommunications, distributed power architectures, battery operated equipment, industrial, and mobile equipment applications.

2. DC-DC Converter Features

- 33-50W Isolated Output
- Efficiency to 89%
- 300/400KHz Switching Frequency
- 2:1 Wide Input Range
- Regulated Outputs
- Continuous Short Circuit Protection
- Five-Sided Metal Case
- Half-Brick Size Meets Industrial Standard
- Safety Meets IEC/EN/UL 62368-1
- UL 60950-1 Approval

3. Electrical Block Diagram

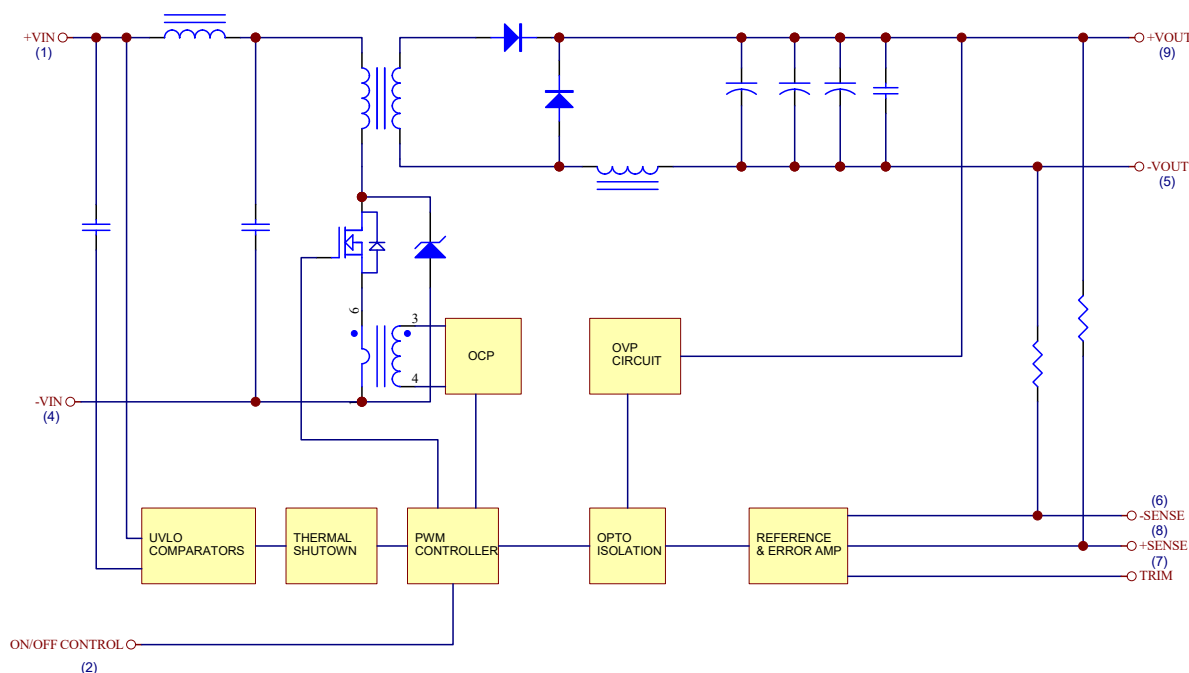


Figure 1 Electrical Block Diagram of CHB50 Series Module



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

4. Technical Specifications

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage						
Continuous		12SXX	-0.3		18	V_{dc}
		24SXX	-0.3		36	
		48SXX	-0.3		75	
Transient	100ms	12SXX			25	V_{dc}
		24SXX			50	
		48SXX			100	
Operating Case Temperature		All	-40		100	°C
Storage Temperature		All	-40		105	°C
Isolation Voltage	1 Minute; input/output, input/case, output/case	All	1500			V_{dc}

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		12SXX	9	12	18	V _{dc}
		24SXX	18	24	36	
		48SXX	36	48	75	
Input Under Voltage Lockout						
Turn-On Voltage Threshold		12SXX	8.8			V _{dc}
		24SXX	17			
		48SXX	34			
Turn-Off Voltage Threshold		12SXX	8			V _{dc}
		24SXX	16			
		48SXX	32.5			
Maximum Input Current	100% Load, V _{in} =9V	12SXX	7			A
	100% Load, V _{in} =18V	24SXX	3.5			
	100% Load, V _{in} =36V	48SXX	2			
No-Load Input Current		All	50			mA
Inrush Current (I ² t)		All	TBD			A ² s
Input Reflected Ripple Current	P-P thru 12uH inductor, 5Hz to 20MHz	All	TBD			mA

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V_{in} =Nominal V_{in} , $I_o = I_{o_max}$, T_c =25°C	V_o =3.3V	3.267	3.3	3.333	V_{dc}
		V_o =5.0V	4.95	5	5.05	
		V_o =12V	11.88	12	12.12	
		V_o = 15V	14.85	15	15.15	
		V_o =24V	23.76	24	24.24	
Output Voltage Regulation						
Load Regulation	I_o = $I_{o_min.}$ to $I_{o_max.}$	All			±0.2	%
Line Regulation	V_{in} =Low line to high line	All			±0.2	%
Temperature Coefficient	T_c =-40°C to 100°C	All			±0.03	%/°C



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Ripple and Noise						
Peak-to-Peak	5Hz to 20MHz bandwidth, full load 10uF tantalum and 1.0uF ceramic capacitors	Vo=3.3&5.0V Vo=12&15V Vo=24V			75 100 240	mV
RMS	5Hz to 20MHz bandwidth, full load, 10uF solid tantalum and 1.0uF ceramic capacitors	Vo=3.3&5.0V Vo=12&15V Vo=24V			20 30 100	mV
Operating Output Current Range		Vo= 3.3V Vo=5.0V Vo=12V Vo=15V Vo=24V	0 0 0 0 0		10 10 4.16 3.33 2.08	A
Output DC Current Limit Inception	Output voltage=90% nominal output voltage	All	110		150	%
Maximum Output Capacitance	Full load (resistive)	Vo= 3.3V Vo=5.0V Vo=12V Vo=15V Vo=24V	0 0 0 0 0		10000 10000 4000 2000 1500	uF

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Step Change in Output Current	75% to 100% of I_{o_max}	All			±5	%
Setting Time (within 1% V_{out} Nominal)	$dI/dt=0.1A/us$	All			500	us
Turn-On Delay and Rise Time						
Turn-On Delay Time, From Input	$V_{in_min.}$ to 10% V_{o_set}	12SXX 24SXX 48SXX		2 2 17		ms
Output Voltage Rise Time	10% V_{o_set} to 90% V_{o_set}	24S05 48S05 Others		0.4 3		ms

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	V_{in} =Nominal V_{in}	12S33 12S05 12S12 12S15 12S24		79 83 87 87 87		%



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	V_{in} =Nominal V_{in}	24S33		81		%
		24S05		85		
		24S12		88		
		24S15		88		
		24S24		88		
		48S33		81		
		48S05		84		
		48S12		88		
		48S15		88		
		48S24		89		

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage	1 Minute; input/output, input/case, output/case	All			1500	V_{dc}
Isolation Resistance		All	10			MΩ
Isolation Capacitance		All		1000		pF

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency		12SXX	400			KHz
		24SXX	400			
		48SXX	300			
On/Off Control, Positive Remote On/Off Logic						
Logic Low (Module Off)	$V_{on/off}$ at $I_{on/off}$ =1.0mA (open collector circuit drive only)	All	0	0.8		V
Logic High (Module On)	$V_{on/off}$ at $I_{on/off}$ =0.0uA	All	Open Circuit			V
On/Off Control, Negative Remote On/Off Logic						
Logic High (Module Off)	$V_{on/off}$ at $I_{on/off}$ =0.0uA	All	Open Circuit			V
Logic Low (Module On)	$V_{on/off}$ at $I_{on/off}$ =1.0mA	All	0	0.8		V
Off Converter Input Current	Shutdown input idle current	All	15			mA
Output Voltage Trim Range	P_{out} =max rated power	All	-10	+10		%
Output Over Voltage Protection	Zener or TVS Clamp	All	115	125	140	%
Over-Temperature Protection	Shutdown Case Temperature	All	100			°C
	Restart threshold Case Temperature	All	70			°C

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ of $I_{o,max}$; $T_a=25^{\circ}C$ per MIL-HDBK-217F	All		1000		K hours
Weight		All		88		grams



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

5. Main Features and Functions

5.1 Operating Temperature Range

The CHB50 series converters can be operated within a wide case temperature range of -40°C to 100°C . Consideration must be given to the derating curves when ascertaining maximum power that can be drawn from the converter. The maximum power drawn from half brick models is influenced by usual factors, such as:

- Input voltage range
- Output load current
- Forced air or natural convection

5.2 Output Voltage Adjustment

Section 6.8 describes in detail how to trim the output voltage with respect to its set point. The output voltage on all models is adjustable within the range of $+10\%$ to -10% .

5.3 Over Current Protection


All models have internal over current and continuous short circuit protection. The unit operates normally once the fault condition is removed. At the point of current limit inception, the output voltage of converter will be going down into current limit and power fold-back protection.

5.4 Output Over Voltage Protection

The output over voltage protection consists of a zener diode or TVS. If more accurate output over voltage protection is required, an external circuit can be used via the remote **on/off** pin.

5.6 Remote On/Off

The CHB50 series allows the user to switch the module on and off electronically with the remote on/off feature. All models are available in "positive logic" and "negative logic" (optional) versions. The converter turns on if the remote **on/off** pin is open circuit. Setting the pin low (0 to $<0.8V_{dc}$) will turn the converter off (open collector circuit only). The signal level of the remote **on/off** input is defined with respect to ground. If not using the remote **on/off** pin, leave the pin open (converter will be on). Models with part number suffix "N" are the "negative logic" remote **on/off** version. The unit turns off if the remote **on/off** pin is open circuit. The converter turns on if the **on/off** pin input is low (0 to $<0.8V_{dc}$). Note that the converter is off by default.

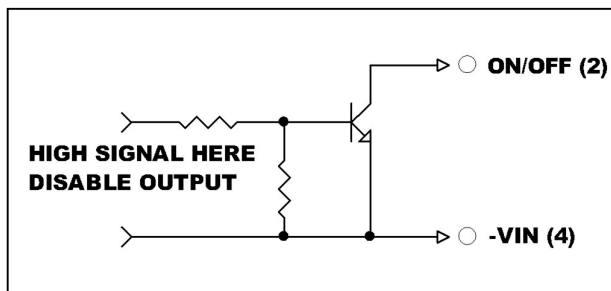

5.7 UVLO (Under Voltage Lock Out)

Input under voltage lockout is standard on the CHB50 unit. The unit will shut down when the input voltage drops below a threshold, and the unit will operate when the input voltage goes above the upper threshold.

5.8 Over Temperature Protection

These modules have an over temperature protection circuit to safeguard against thermal damage. The module shuts down and latches off when the maximum case reference temperature is exceeded. The module will restart when the case temperature falls below restart threshold.




CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

6. Applications

6.1 Recommended Layout, PCB Footprint and Soldering Information

The system designer or end user must ensure that metal and other components in the vicinity of the converter meet the spacing requirements for which the system is approved. Low resistance and inductance PCB layout traces are the norm and should be used where possible. Due consideration must also be given to proper low impedance tracks between power module, input and output grounds. The recommended soldering profile and PCB layout are shown below.

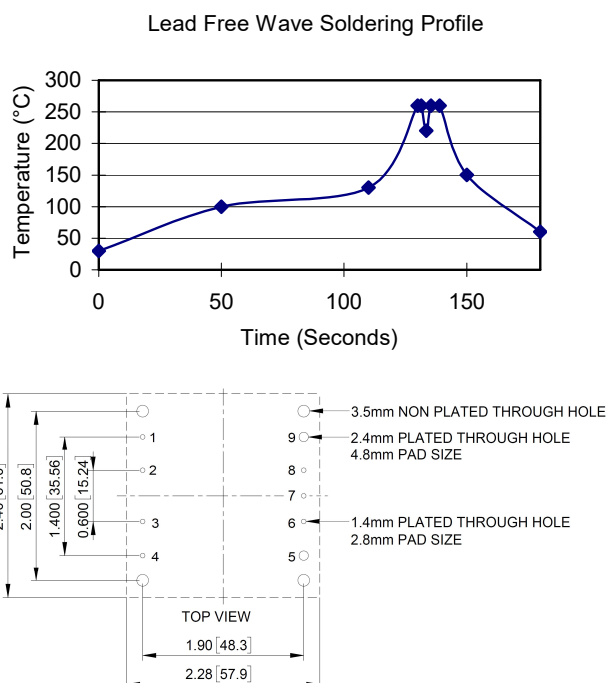

Hand Soldering Information:

Hand soldering is the least preferred method because the amount of solder applied, the time the soldering iron is held on the joint, the temperature of the iron, and the temperature of the solder joint are variable. The recommended hand soldering guideline is listed in following table.

Hand-Soldering Guideline

Parameter	Single-side Circuit board	Double-side Circuit board	Multi-layers Circuit board
Soldering Iron Wattage	90W	90W	90W
Tip Temp.	385+/-10°C	420+/-10°C	420+/-10°C
Soldering Time	2~6 Seconds	4~10 Seconds	4~10 Seconds

The suggested soldering process must keep the power module's internal temperature below the critical temperature of 217°C continuously.

Clean the soldered side of the module with a brush, prevent liquid from getting into the module. Do not clean by soaking the module into liquid. Do not allow solvent to come in contact with product labels or resin case as this may changed the color of the resin case or cause deletion of the letters printed on the product label. After cleaning, dry the modules well.

Cleaning and washing information as following link: [Cincon module washing/cleaning guideline.](#)

6.2 Convection Requirements for Cooling

To predict the approximate cooling needed for the half brick module, refer to the power derating curves in section 6.4. These derating curves are approximations of the ambient temperatures and airflows required to keep the power module temperature below its maximum rating. Once the module is assembled in the actual system, the module's temperature should be monitored to ensure it does not exceed 100°C as measured at the center of the top of the case (thus verifying proper cooling).

6.3 Thermal Considerations


The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. The example is presented in section 6.4. The power output of the module should not be allowed to exceed rated power ($V_{o_set} \times I_{o_max}$).



CHB50 33-50W Isolated DC-DC Converter Application Note V12 May 2026

6.4 Input Capacitance at The Power Module

The converters must be connected to low AC source impedance. To avoid problems with loop stability source inductance should be low. Also, the input capacitors (C_{in}) should be placed close to the converter input pins to decouple distribution inductance. However, the external input capacitors are chosen for suitable ripple handling capability. Low ESR capacitors are good choice. Circuit as shown as below represents typical measurement methods for reflected ripple current. $C1$ and $L1$ simulate a typical DC source impedance. The input reflected-ripple current is measured by current probe to oscilloscope with a simulated source Inductance ($L1$).

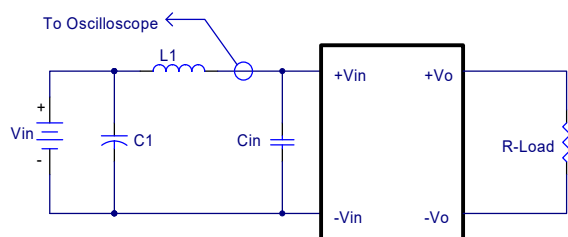

L1: TBD

C1: TBD

C_{in} : TBD

Input Reflected-Ripple Test Setup




CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

6.5 Power Derating

The operating case temperature range of CHB50 series is -40°C to +100°C. When operating the CHB50 series, proper derating or cooling is needed. The maximum case temperature under any operating condition should not exceed 100°C.

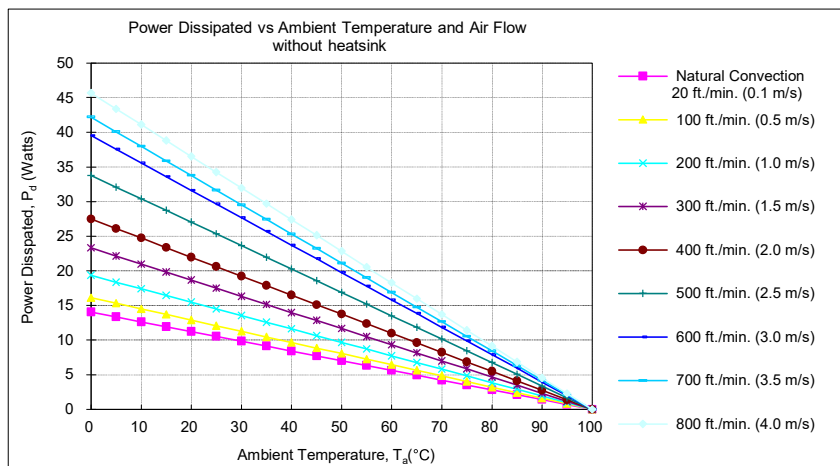

AIR FLOW RATE	TYPICAL R_{ca}
Natural Convection 20ft./min. (0.1m/s)	7.12°C/W
100 ft./min. (0.5m/s)	6.21°C/W
200 ft./min. (1.0m/s)	5.17°C/W
300 ft./min. (1.5m/s)	4.29°C/W
400 ft./min. (2.0m/s)	3.64°C/W
500 ft./min. (2.5m/s)	2.96°C/W
600 ft./min. (3.0m/s)	2.53°C/W
700 ft./min. (3.5m/s)	2.37°C/W
800 ft./min. (4.0m/s)	2.19°C/W

Example:

What is the minimum airflow necessary for a CHB50-48S12 operating at nominal line voltage, an output current of 4.16A, and a maximum ambient temperature of 50°C?

Solution:

Given:

$$V_{in}=48V_{dc}, V_o=12V_{dc}, I_o=4.16A$$

Determine power dissipation (P_d):

$$P_d=P_i-P_o=P_o(1-\eta)/\eta$$

$$P_d=12 \times 4.16 \times (1-0.88)/0.88=6.8Watts$$

Determine airflow:

$$\text{Given: } P_d=6.8W \text{ and } T_a=50^\circ C$$

Check above power derating Curve:

Minimum airflow=100 ft./min.

Verify:

The maximum temperature rise

$$\Delta T=P_d \times R_{ca}=6.8 \times 6.21=42.23^\circ C$$

The maximum case temperature

$$T_c=T_a+\Delta T=92.23^\circ C < 100^\circ C$$

Where:


The R_{ca} is thermal resistance from case to ambience

The T_a is ambient temperature and the T_c is case temperature



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

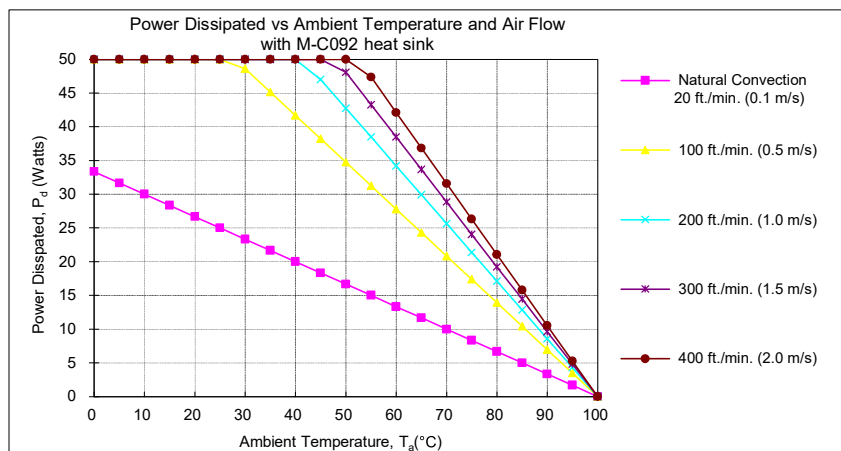

AIR FLOW RATE	TYPICAL R_{ca}
Natural Convection 20ft./min. (0.1m/s)	3°C/W
100 ft./min. (0.5m/s)	1.44°C/W
200 ft./min. (1.0m/s)	1.17°C/W
300 ft./min. (1.5m/s)	1.04°C/W
400 ft./min. (2.0m/s)	0.95°C/W

Example (with heatsink M-C092):

What is the minimum airflow necessary for a CHB50-48S12 operating at nominal line voltage, an output current of 4.16A, and a maximum ambient temperature of 70°C?

Solution:

Given:

$$V_{in}=48V_{dc}, V_o=12V_{dc}, I_o=4.16A$$

Determine power dissipation (Pd):

$$P_d=P_i-P_o=P_o(1-\eta)/\eta$$

$$P_d=12 \times 4.16 \times (1-0.88)/0.88=6.8\text{Watts}$$

Determine airflow:

$$\text{Given: } P_d=6.8W \text{ and } T_a=70^\circ C$$

Check above power de-rating curve:

$$P_d < 10W, \text{ Natural Convection}$$

Verify:

$$\text{Maximum temperature rise is } \Delta T = P_d \times R_{ca} = 6.8 \times 3 = 20.4^\circ C$$

$$\text{Maximum case temperature is } T_c = T_a + \Delta T = 90.4^\circ C < 100^\circ C$$

Where:

The R_{ca} is thermal resistance from case to ambient environment

T_a is ambient temperature and T_c is case temperature

6.6 Half Brick Heat Sinks









Heat sinks assembly [refer to Datasheet-Thermal](#)



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026








6.7 Efficiency VS. Load

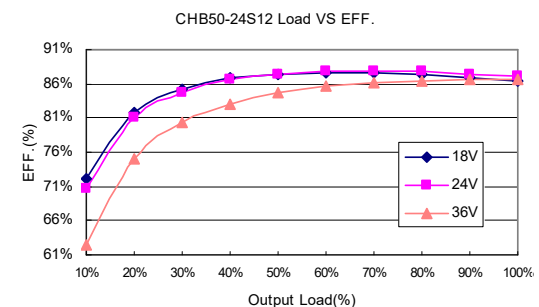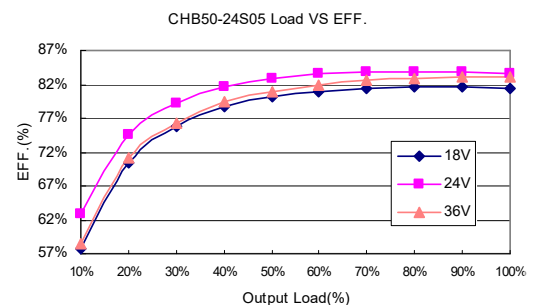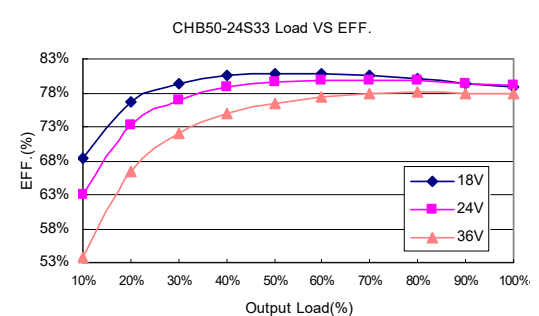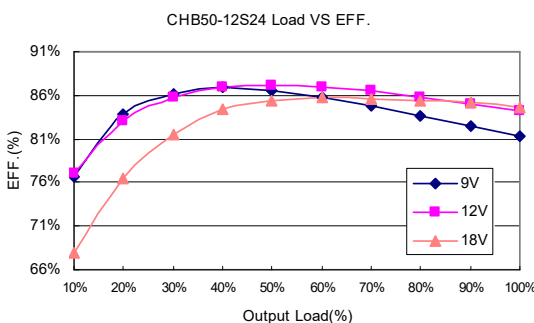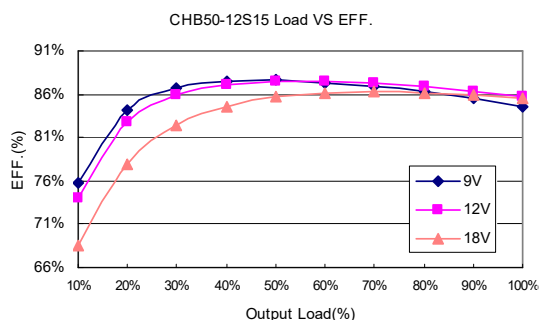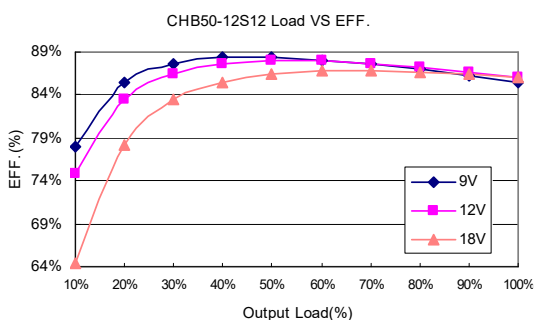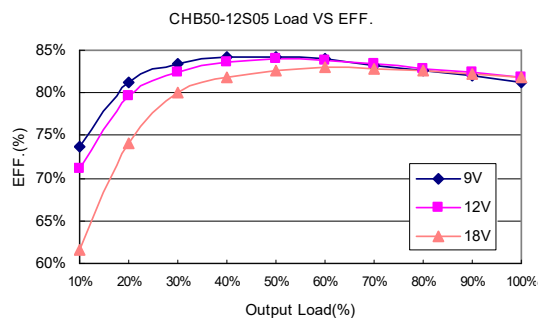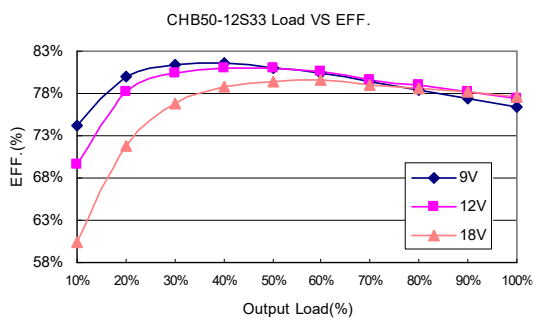



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

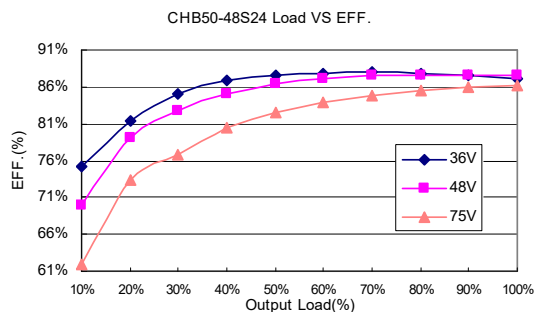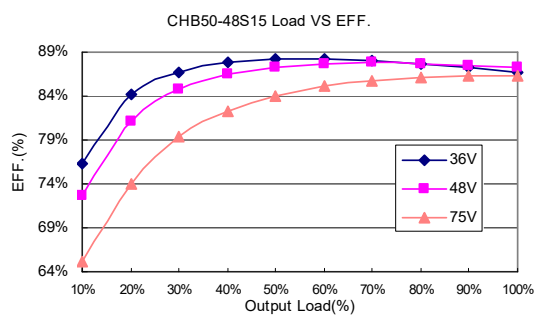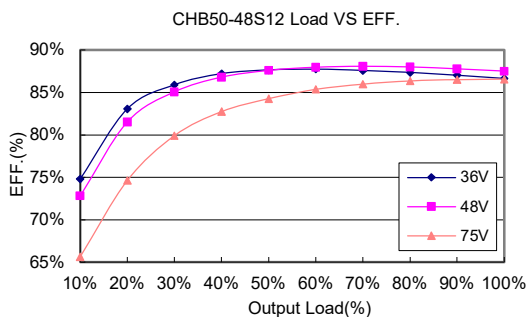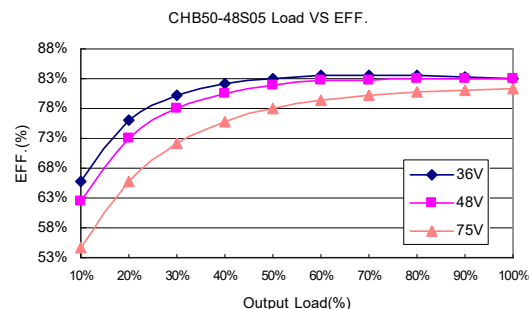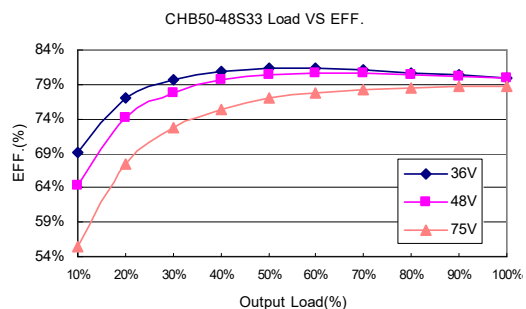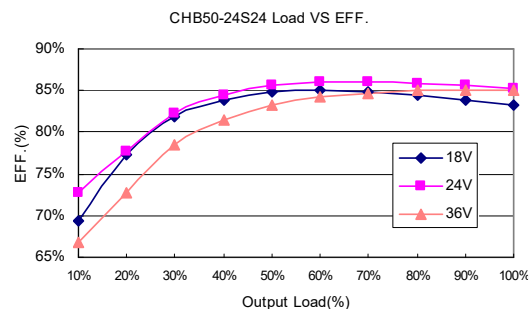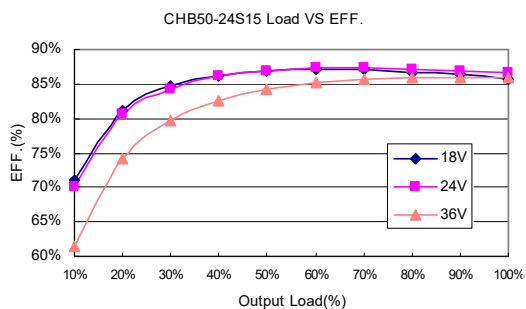



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

6.8 Test Set-Up

The basic test set-up to measure parameters such as efficiency, load regulation and voltage accuracy is shown below. When testing the modules under any transient conditions please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate:

- Efficiency
- Load regulation and line regulation

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{V_{in} \times I_{in}} \times 100\%$$

Where:

V_o is output voltage

I_o is output current

V_{in} is input voltage

I_{in} is input current

The value of load regulation is defined as:

$$Load.reg = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

V_{FL} is the output voltage at full load

V_{NL} is the output voltage at no load


The value of line regulation is defined as:

$$Line.reg = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

V_{HL} is the output voltage of maximum input voltage at full load.


V_{LL} is the output voltage of minimum input voltage at full load

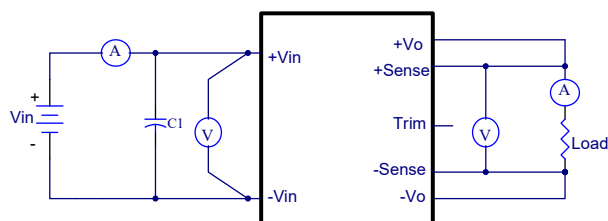

CHB50 Series Test Setup

6.9 Output Voltage Adjustment

In order to trim the voltage up or down, one needs to connect the trim resistor either between the trim pin and $-V_o$ for trim-up or between trim pin and $+V_o$ for trim-down. The output voltage trim range is $\pm 10\%$. This is shown:

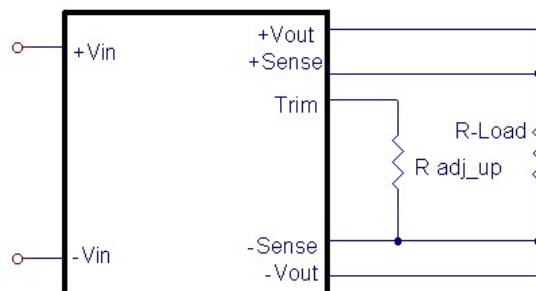

Trim_up Voltage Setup

The value of R_{adj_up} defined as:

$$R_{adj_up} = \frac{(R1 - R2 \times (V_o - V_{o_nom}))}{(V_o - V_{o_nom})} (K\Omega)$$

Model Number	R1 (KΩ)	R2 (KΩ)
CHB50-12S33(N)	3.375	9.000
CHB50-24/48S33(N)	3.168	7.200
CHB50-XXS05(N)	5.800	8.250
CHB50-XXS12(N)	19.656	13.304
CHB50-XXS15(N)	25.474	14.760
CHB50-12S24(N)	41.968	13.968
CHB50-24/48S24(N)	42.215	16.923

Table of Trim_up Resistor Values

Where:

R_{adj_up} is the external resistor in KΩ

V_{o_nom} is the nominal output voltage

V_o is the desired output voltage


R1, R2 are internal components and are defined in the table of trim resistor values

For example, to Trim_up the output voltage of 5V module (CHB50-48S05) by 8% to 5.4V, R_{adj_up} is calculated as follows:

$$V_o - V_{o_nom} = 5.4 - 5.0 = 0.4V$$

$$R1 = 5.8 K\Omega, R2 = 8.25 K\Omega$$

$$R_{adj_up} = \frac{5.8 - 8.25 \times 0.4}{0.4} = 6.25 (K\Omega)$$

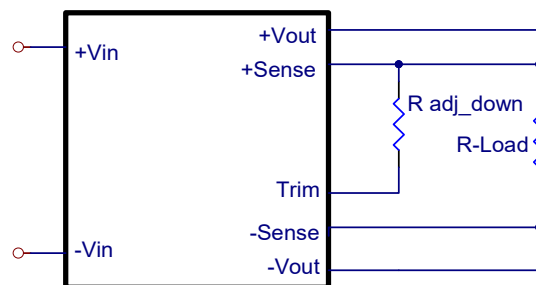

Trim_down Voltage Setup



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

The value of R_{adj_down} defined as:

$$R_{adj_down} = \frac{R1 - R2 \times (V_{o_nom} - V_o)}{(V_{o_nom} - V_o)} (K\Omega)$$

Model Number	R1 (KΩ)	R2 (KΩ)
CHB50-XXS33(N)	6.18	15
CHB50-XXS05(N)	5.8	10.57
CHB50-XXS12(N)	86.45	60.1
CHB50-XXS15(N)	150	94
CHB50-XXS24(N)	430	130

Table of trim down resistor values

Where:

R_{adj_down} is the external resistor in KΩ.

V_{o_nom} is the nominal output voltage.

V_o is the desired output voltage.

R1, R2 are internal components.

For example: to trim-down the output voltage of 5V module (CHB50-48S05) by 8% to 4.6V, R_{adj_down} is calculated as follows:

$$V_{o_nom} - V_o = 5.0 - 4.6 = 0.4V$$

$$R1 = 5.8 K\Omega, R2 = 10.57 K\Omega$$


$$R_{adj_down} = \frac{5.8 - 10.57 \times 0.4}{0.4} = 3.93 (K\Omega)$$

6.10 Output Remote Sensing

The CHB50 Series converter has the capability to remotely sense both lines of its output. This feature moves the effective output voltage regulation point from the output of the unit to the point of connection of the remote sense pins. This feature automatically adjusts the real output voltage of the CHB50 series in order to compensate for voltage drops in distribution and maintain a regulated voltage at the point of load. The remote-sense voltage range is:


$$[(+V_{out}) - (-V_{out})] - [(+Sense) - (-Sense)] \leq 10\% \text{ of } V_{o_nominal}$$

If the remote sense feature is not to be used, the sense pins should be connected locally. The +Sense pin should be connected to the +V_{out} pin at the module and the -Sense pin should be connected to the -V_{out} pin at the module. This is shown in the schematic below.

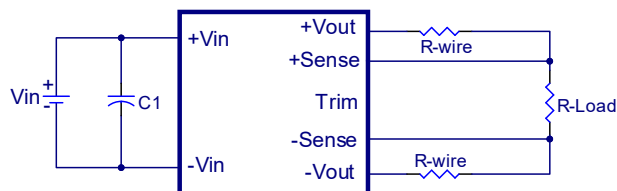

Note: Although the output voltage can be varied (increased or decreased) by both remote sense and trim, the maximum variation for the output voltage is the larger of the two values not the sum of the values. The output power delivered by the module is defined as the voltage at the output terminals multiplied by the output current. Using remote sense and trim can cause the output voltage to increase and consequently increase the power output of the module if output current remains unchanged. Always ensure that the output power of the module remains at or below the maximum rated power. Also be aware that if V_{o_set} is below nominal value, P_{out_max} will also decrease accordingly because I_{o_max} is an absolute limit. Thus, $P_{out_max} = V_{o_set} \times I_{o_max}$ is also an absolute limit.

6.11 Output Ripple and Noise

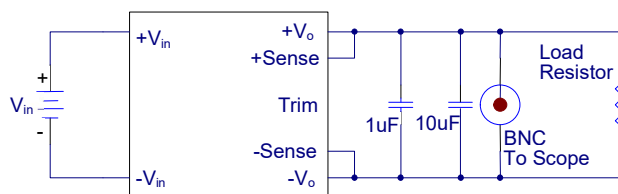

Output ripple and noise is measured with 1.0uF ceramic and 10uF solid tantalum capacitors across the output.

6.12 Output Capacitance

The CHB50 series converters provide unconditional stability with or without external capacitors. For good transient response, low ESR output capacitors should be located close to the point of load. PCB design emphasizes low resistance and inductance tracks in consideration of high current applications. Output capacitors with their associated ESR values have an impact on loop stability and bandwidth. Cincon's converters are designed to work with load capacitance to see technical specifications.




CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

7. Safety & EMC

7.1 Input Fusing and Safety Considerations

The CHB50 series converters have no internal fuse. In order to achieve maximum safety and system protection, always use an input line fuse. We recommended a 8A fast acting fuse for 12V_{in} models, 4A for 24V_{in} models and 2.25A for 48V_{in} models. It is recommended that the circuit have a transient voltage suppressor diode (TVS) across the input terminal to protect the unit against surge or spike voltage and input reverse voltage (as shown).

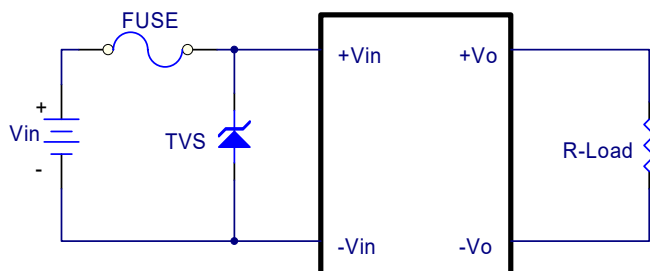

7.2 EMC Considerations

Suggested Circuits for Conducted EMI Class A & Class B

(1) EMI and Conducted Noise Meet EN 55032 Class A&B Specifications:


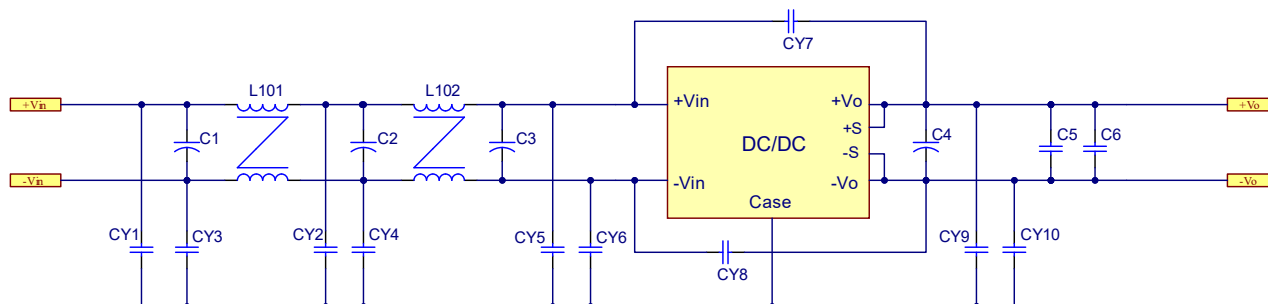



Figure1 Connection Circuit for Conducted EMI Class A&B Testing



CHB50 33-50W Isolated DC-DC Converter Application Note V12 May 2026

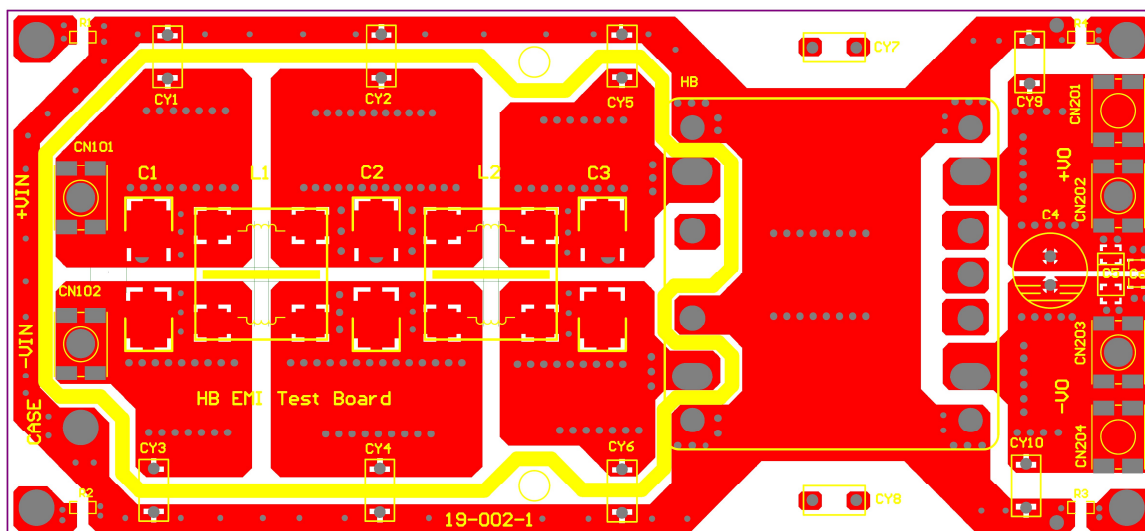

EMI Test Board Top View

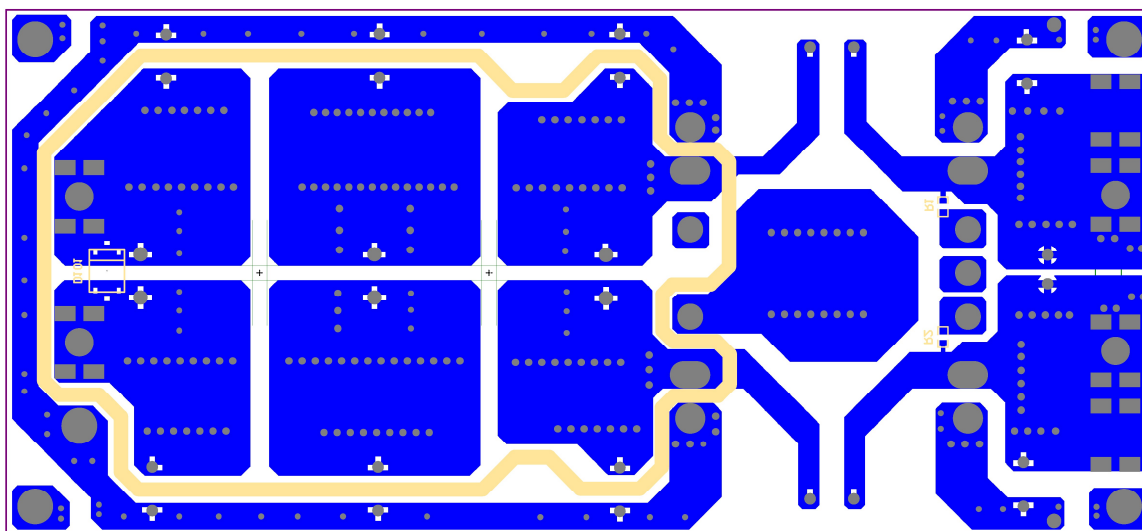

EMI Test Board Bottom View



CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026

Model No.	Class A			
	C2	C3	CY6	L2
CHB50-24SXX	100uF/50V ESR < 0.17Ω	100uF/50V ESR < 0.17Ω	1500pF 1206	1.5uH
CHB50-48SXX	100uF/100V ESR < 0.12Ω	100uF/100V ESR < 0.12Ω	1500pF 1206	1.5uH

Note:

CHB50-24SXX C2, C3: EKY-500ELL101MHB5D NCC
 CHB50-48SXX C2, C3: 100YXJ100M10X20 RUBYCON
 CY6: MLCC Capacitor
 L2: 7443552150 1.5uH 20% 17A WURTH
 C1, C4, C5, C6, CY1, CY2, CY3, CY4, CY5, CY7, CY8, CY9, CY10, L1: NC

Model No.	Class B						
	C1	C2	C3	CY6	CY8	L1	L2
CHB50-24SXX	100uF/50V ESR < 0.17Ω	100uF/50V ESR < 0.17Ω	100uF/50V ESR < 0.17Ω	2200pF 1206	1500pF 1206	0.47mH	1.5uH
CHB50-48SXX	100uF/100V ESR < 0.12Ω	100uF/100V ESR < 0.12Ω	100uF/100V ESR < 0.12Ω	2200pF 1206	1500pF 1206	0.47mH	1.5uH

Note:

CHB50-24SXX C1, C2, C3: EKY-500ELL101MHB5D NCC
 CHB50-48SXX C1, C2, C3: 100YXJ100M10X20 RUBYCON
 CY6, CY8: MLCC Capacitor
 L1: 744844471 0.47mH 9A WURTH
 L2: 7443552150 1.5uH 20% 17A WURTH
 C4, C5, C6, CY1, CY2, CY3, CY4, CY5, CY7, CY9, CY10: NC




CHB50 33-50W Isolated DC-DC Converter

Application Note V12 May 2026


Conducted Class A

CHB50-24S12

Line

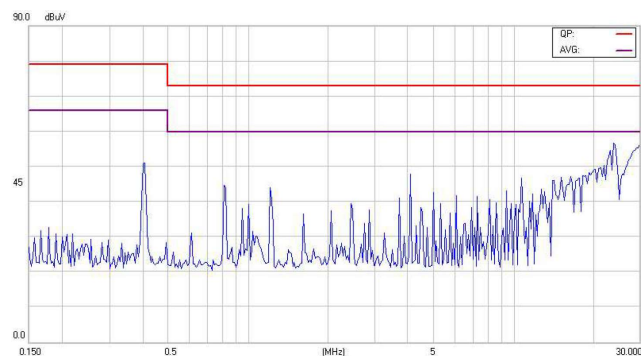


Neutral

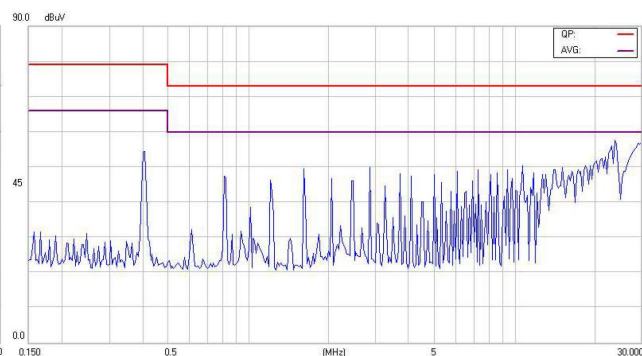


CHB50-24S15

Line

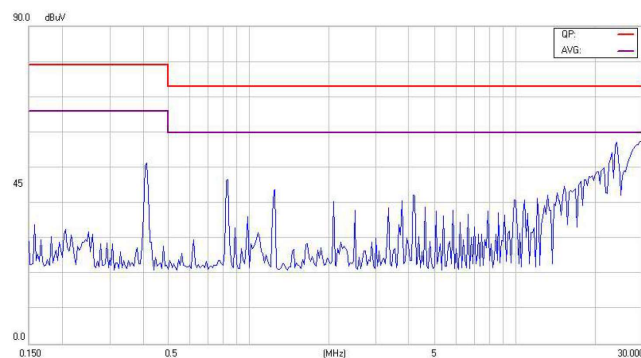


Neutral

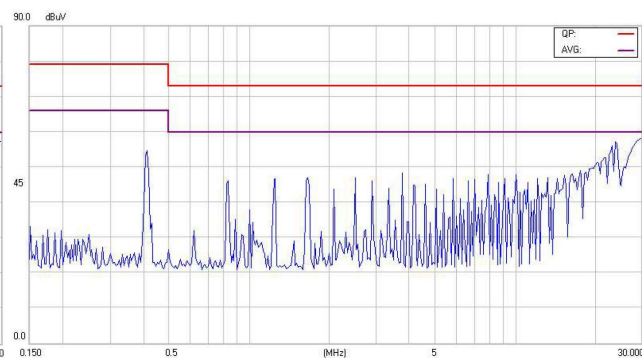


CHB50-24S24

Line

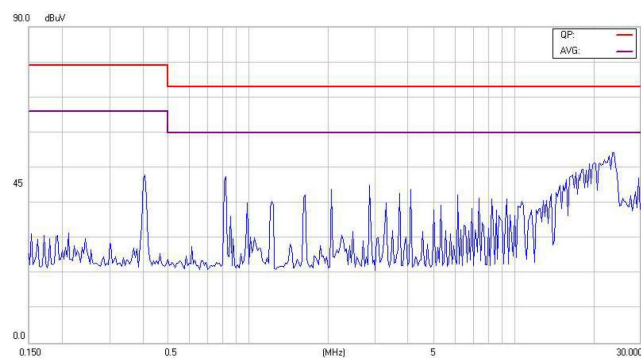

Neutral

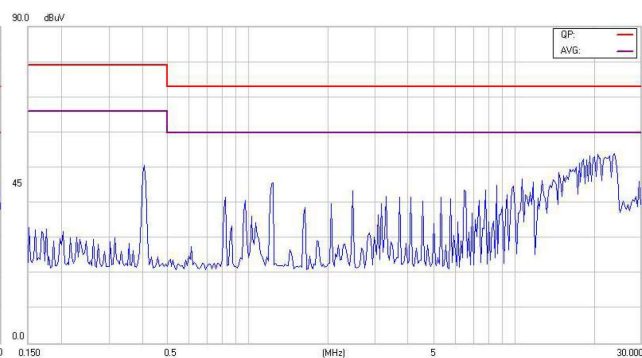




CHB50 33-50W Isolated DC-DC Converter


Application Note V12 May 2026

CHB50-48S33

Line

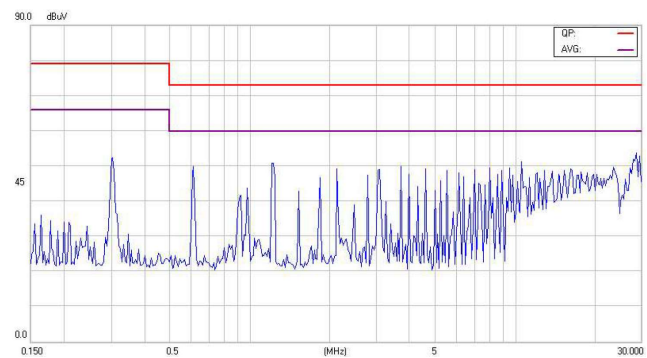


Neutral

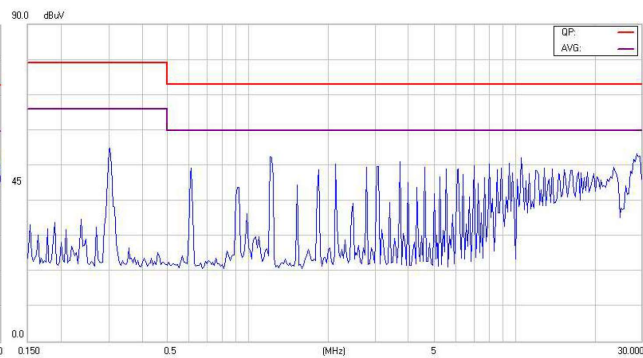


CHB50-48S05

Line

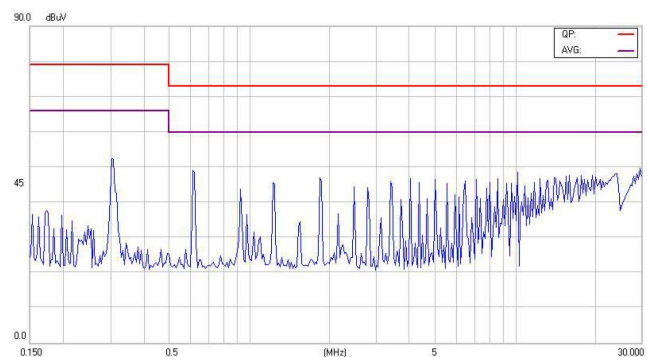


Neutral

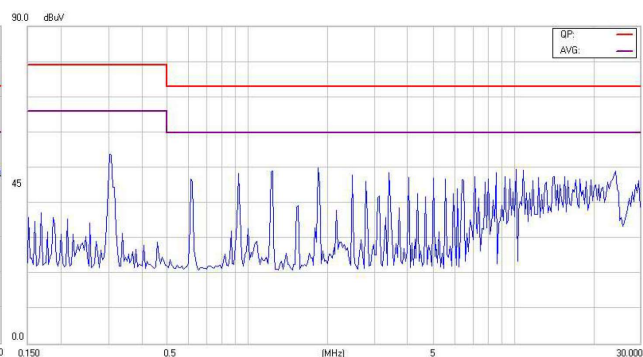


Conducted Class B

CHB50-24S12

Line

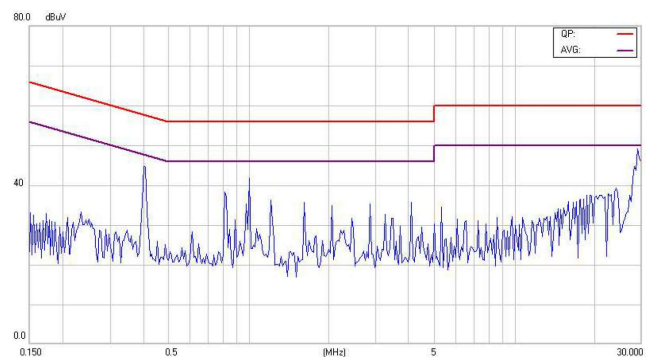

Neutral

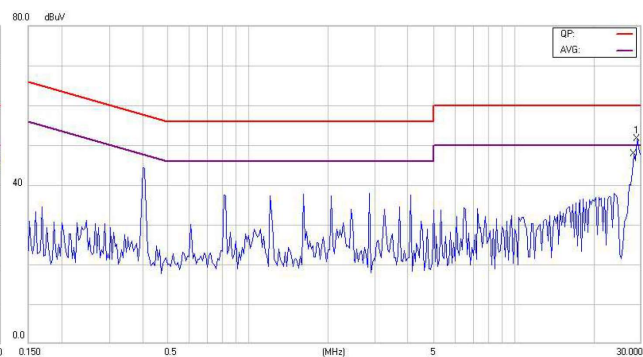




CHB50 33-50W Isolated DC-DC Converter


Application Note V12 May 2026

CHB50-24S15

Line

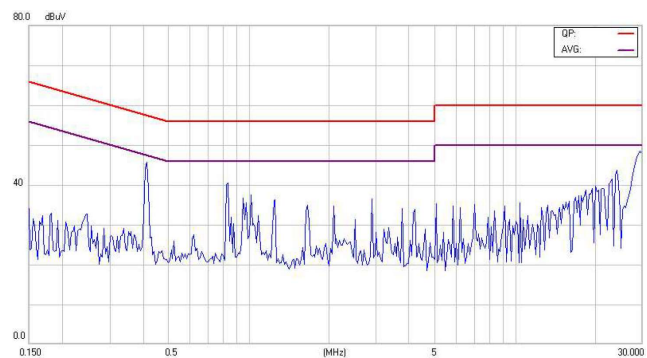


Neutral

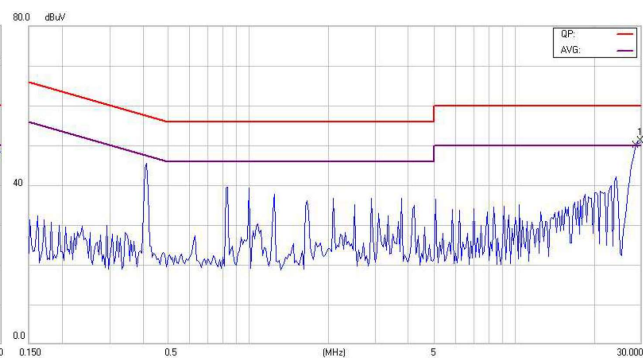


CHB50-24S24

Line

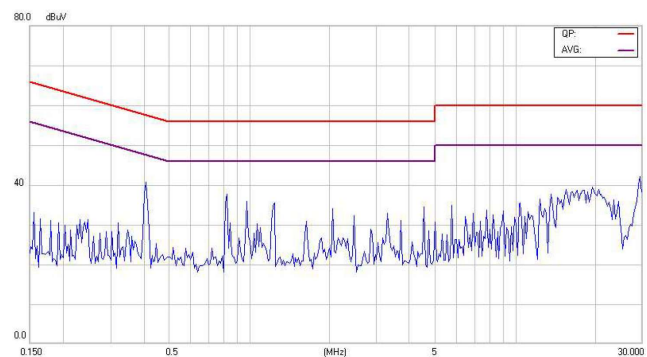


Neutral

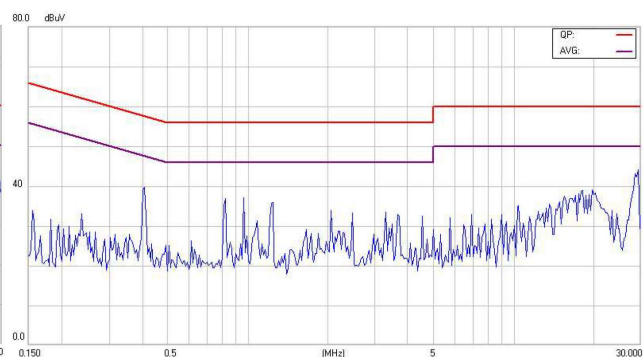


CHB50-48S33

Line

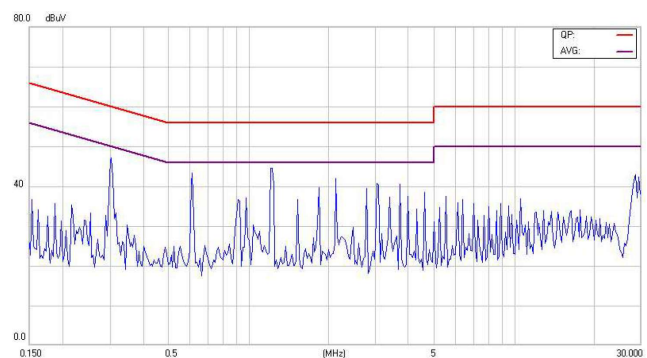

Neutral

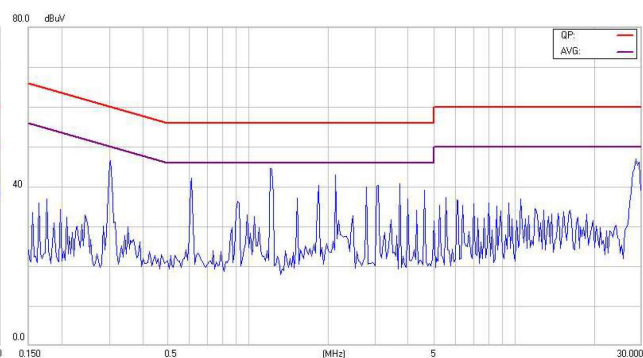




CHB50 33-50W Isolated DC-DC Converter


Application Note V12 May 2026

CHB50-48S05

Line

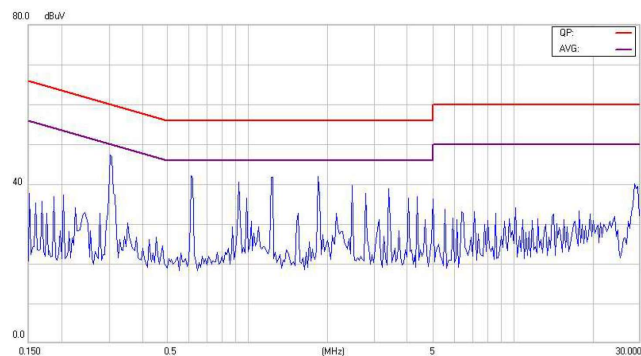

Neutral

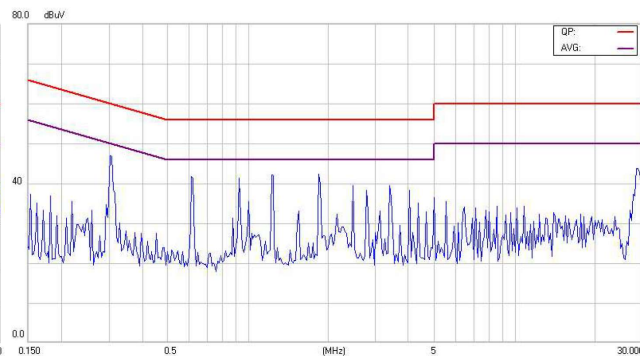

8. Part Number

Format: CHB50 – II O XX L Y

Parameter	Series	Nominal Input Voltage	Number of Outputs	Output Voltage	Remote On/Off Logic	Mounting Inserts
Symbol	CHB50	II	O	XX	L	Y (Option)
Value	CHB50	12 : 12 Volts 24 : 24 Volts 48 : 48 Volts	S : Single	33 : 3.3Volts 05 : 05Volts 12 : 12Volts 15 : 15Volts 24 : 24Volts	None : Positive N : Negative	-C : Clear Mounting Insert (3.2mm DIA.)

CINCON ELECTRONICS CO., LTD.

Headquarters:

14F, No.306, Sec.4, Hsin Yi Rd.
Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com
Web Site: <https://www.cincon.com>

Factory:

No. 8-1, Fu Kung Rd.
Fu Hsing Industrial Park
Fu Hsing Hsiang,
ChangHua Hsien, Taiwan
Tel: 886-4-7690261
Fax: 886-4-7698031

Cincon North America:

1655Mesa Verde Ave. Ste 180
Ventura, CA93003
Tel: 805-639-3350
Fax: 805-639-4101
E-mail: info@cincon.com